


레벨컨트롤러(Level Controller)

컨트롤러(Controller)의 사양 (Technical Data)



사양 / 모델	WDI-LIC4	WDI-LIC2C	WDI-LIC2C	WDI-3000D	WDI-3000DV	WDI-4000D
Power	AC110/220V	AC110/220V	AC110/220V	AC110/220V	AC110/220V	AC110/220V
Input signal	4-20mA	4-20mA	4-20mA	4-20mA	4-20mA	4-20mA
Source	DC24V	DC24V	DC24V	DC24V	DC24V	DC24V
Ambient temp'	-20℃ to 60℃	-20℃ to 60℃	-20℃ to 60℃	-20℃ to 60℃	-20℃ to 60℃	-20℃ to 60℃
Output	Relay contact	Relay contact	Relay contact	Relay contact	Relay contact	Relay contact
Contact capacity	250V 5A	250V 5A	250V 5A	250V 5A	250V 5A	250V 5A
Function	H,CON,L	CON	H, L	Program	Program	Program
Input Resistance	250Ω	250Ω	250Ω	100Ω	100Ω	100Ω
Accuracy	2% F.S.	2% F.S.	2% F.S.	0.2% F.S.	0.2% F.S.	0.2% F.S.
Display range	None	None	None	0-100%	0-100%	0-100%
Mounting	Wall mount	Wall mount	Wall mount	Panel mount	Panel mount	Wall mount
Dimension	89x128x66	89x128x66	89x128x66	94x48x112	48x96x112	89x128x66
Weight	480g	480g	480g	480g	480g	460g

컨트롤러(Controller)의 외형도

WDI-4000D

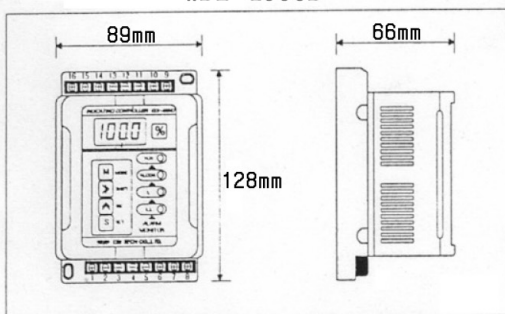


WDI-3000D/WDI-3000DV

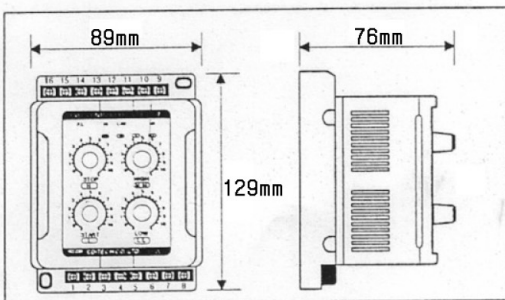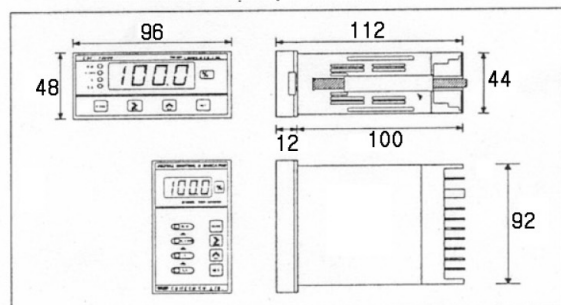


WDI-LIC4/WDI-LIC2C/WDI-LIC2A

콘트롤러(Controller)의 고정 홀 가공위치

◆ WDI-4000D, WDI-LIC4

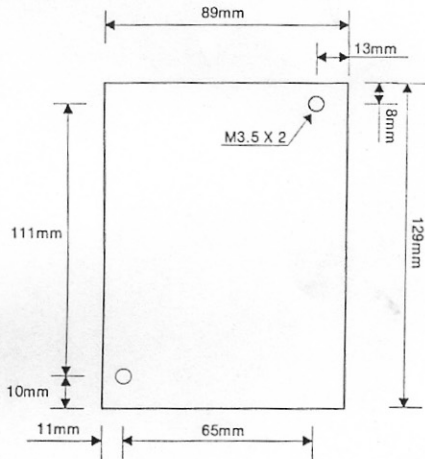


WDI-3000D, WDI-3000DV

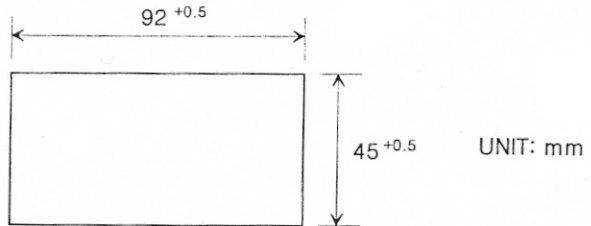


콘트롤러(Controller)의 결선도

◆ WDI-3000D CONTROL CONNECTION

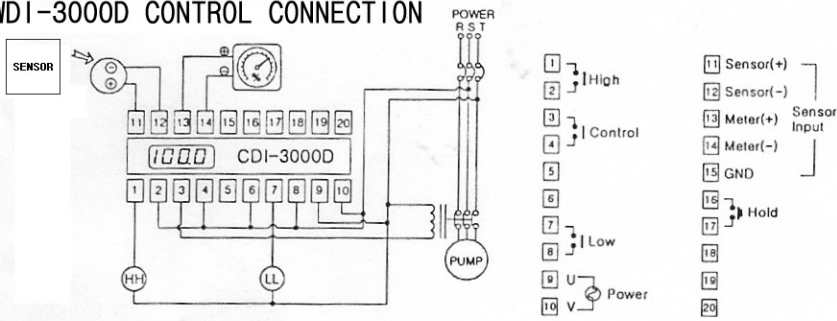


콘트롤러 WDI-3000D 및 WDI-3000DV는 판넬 전면취부용으로 사용하며 일반적으로는 Meter를 별도로 사용하지 않기 때문에 특별히 Meter를 사용하지 않을 경우에는 11번 단자와 14번 단자에 센서의 두 단자를 결선하여야 한다.

◆ WDI-3000D ALARM CONNECTION

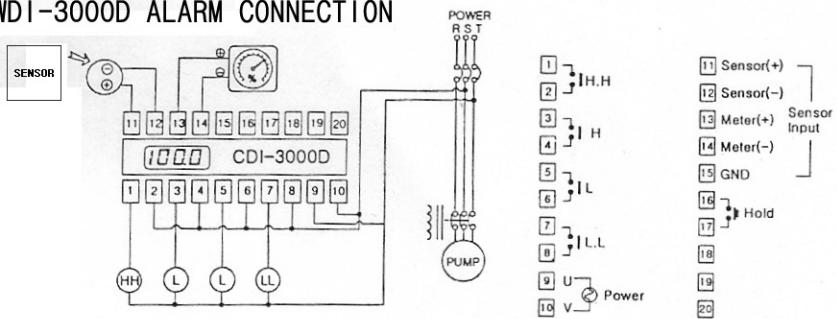


◆ WDI-LIC4 CONTROL CONNECTION

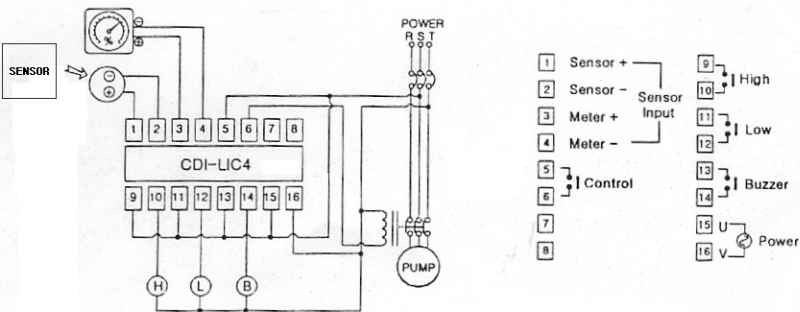


콘트롤러 WDI-LIC4/2는 판넬 내부에 취부하는 용도로 사용되며, 감시용 지시계를 연결하여 사용할 목적에 많이 적용된다. 감시용 지시계를 사용하지 않을 경우에는 단자 1번과 단자4번에 센서의 두 선을 연결하여야 한다.

◆ WDI-4000D CONTROL CONNECTION

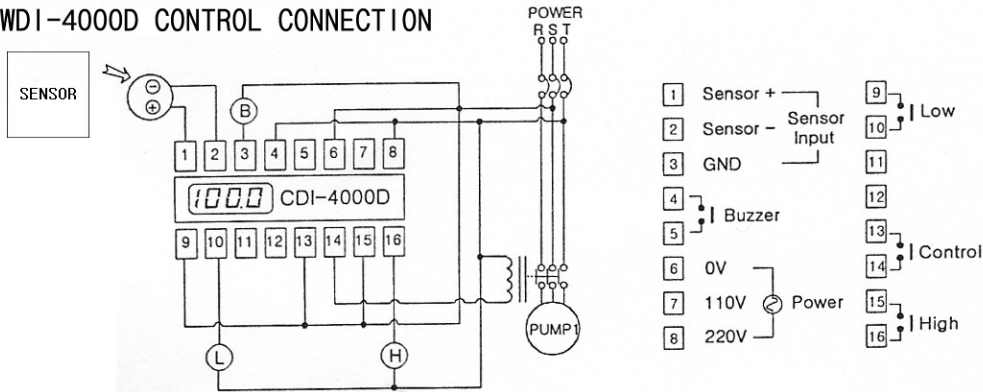

◆ WDI-4000D ALARM CONNECTION

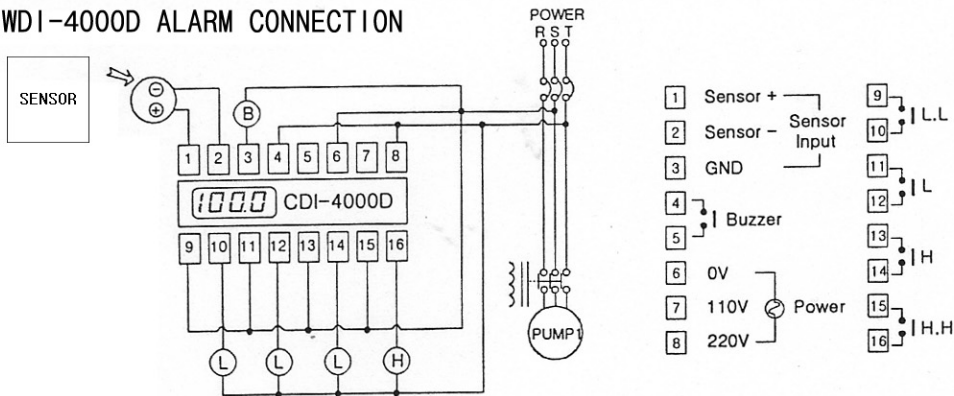

컨트롤러 WDI-4000D는 판넬내부에 부착하여 펌프나 밸브제어 및 경보용으로 사용되며 일반적으로 감시용 지시계를 연결하여 사용한다. 이때 지시계는 센서의 두 단자와 직렬로 연결하여 사용하면 된다. <아래 연결도 참조>

